






805 West Elm Avenue / P.O. Box 144 / Hanover, PA 17331  
 Phone: 717 630 1251 Fax: 717 630 1271  
 info@asst.com / www.asst.com

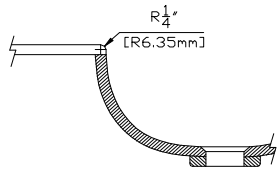

SEAMED UNDERMOUNT

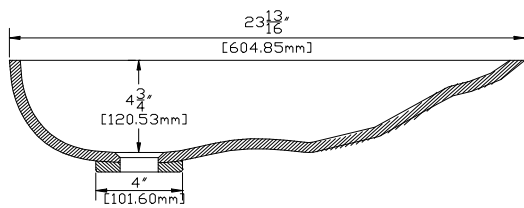

SIDE CROSS-SECTION

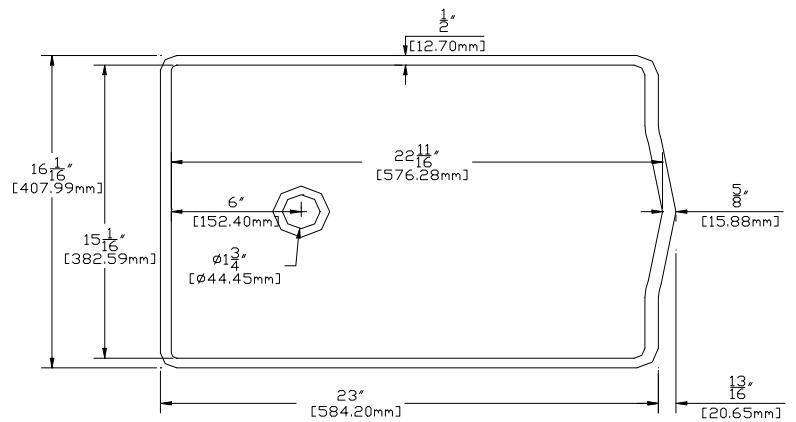

TOP VIEW

### INSTALLATION INSTRUCTIONS:

1. INSTALL BOWL AS A SEAMED UNDERMOUNT.
2. FLUSH TRIM SIDES & DEEP END OF BOWL WITH A BOTTOM BEARING ROUTER BIT.
3. FLUSH TRIM THE SHALLOW END OF THE BOWL WITH THE COVING ROUTER.
4. SAND THE INSIDE PERIMETER OF THE BOWL FLUSH.
5. PROFILE ROUT THE TWO SIDES AND THE DEEP END OF THE BOWL WITH THE 1/4" RADIUS ROUNDING BIT.
6. SAND BREAK THE SHALLOW END OF THE BOWL.
7. FINISH AS DESIRED.

### ROUTERS REQUIRED:

- 2 1/2 HP TO 3 1/2 HP ROUTER WITH 1/2" DIA. BOTTOM BEARING FLUSH TRIM BIT.
- 3 1/4 HP COVING ROUTER WITH A 1/2" DIA. BOTTOM BEARING FLUSH TRIM BIT. THIS BIT MUST HAVE A MINIMUM CUTTING LENGTH OF 2".
- 1 1/2 HP TO 2 1/2 HP ROUTER WITH 1/4" RADIUS CORNER ROUNDING BIT.

## A.S.S.T. BABY BATHING BOWL